Food Establishment Plan Review Guide

SUFFOLK COUNTY DEPARTMENT OF HEALTH SERVICES

BUREAU OF PUBLIC HEALTH PROTECTION
360 YAPHANK AVE, SUITE 2A
YAPHANK, NY 11980

Public Health
Prevent. Promote. Protect.

Table of Contents

Preface 3

Plan Review Submission Checklist 4

Plan Review Guidelines 5

Plan Review Application 5

Food Establishment Permit Application 5

Sewage Disposal Questionnaire 5

Sewage Disposal Questionnaire-Continued 6

Water Heater Info Sheet 6

Menu 6

Spec Sheets for Equipment 7

Architectural Plans 7

Additional Information 8

Refrigeration and Hot Holding 8

Cooking Equipment and Preparation Space 8

Food Protection Equipment 9

Storage Facilities 9

Plumbing 10

Water Heater Requirements 10

Food Prep Sinks 11

Ware Washing 11

Hand Washing Facilities 11

Mop Sink 12

Dipper Wells 12

Personal Items 12

Toilet Facilities 12

Exterior Garbage Storage 12

Catering 12

FAQ's 13

Food Establishment Plan Review Guide

Suffolk County Department of Health Services

Plan Review Application Form

Permit Application Form

Sewage Review Questionnaire – Septic Systems

Sewage Review Questionnaire – Sewers

Water Heater Information Sheet

Water Heater Calculation Sheet

Sample Plan and Plumbing Riser Diagram

Preface

The function of plan review is to provide a comprehensive overview of your facility that focuses on the intended menu, food product flow, equipment specifications and operational procedures. The end goal is to prevent foodborne illness resulting from poor facility design.

Article 13 of the Suffolk County Sanitary Code requires that properly prepared plans and accompanying application be submitted to the Department when a new food establishment is to be constructed, an existing building is to be converted into a food establishment, or an existing food establishment wishes to substantially remodel.

These plans should include the layout of the establishment as well as the size, type and arrangement of all equipment. Toilet facilities, locker rooms, storage areas, finish material and all other facilities applicable to the food operation such as plumbing, water supply and means of sewage disposal must also be included.

The plans must be submitted to the Department for review and approval before construction is started. The establishment must be constructed in accordance with the approved plans and a pre-operational inspection must be requested and performed prior to opening for business.

The purpose of this guide is to assist you with the submission of plans to this department. Please read through the requirements carefully before any plans are submitted. Should you have any questions, please call the Plan Review Unit at 631-852-5873.

Plan Review Submission Checklist

To prevent delays in the review of your project, please ensure that all of the following items are included with your submission

- ☐ **1.** Plan Review Application and appropriate fee
- ☐ **2.** Food Establishment Permit Application and appropriate fee
- ☐ **3.** Sewage Disposal Questionnaire
- ☐ **4.** Water Heater Info Sheet
- ☐ **5.** Menu of foods to be served
- ☐ **6.** Spec sheets for equipment
- ☐ **7.** One set of plans drawn to ¼ inch scale

It is important that all forms are filled out completely and accurately. Missing and incomplete forms will lengthen the plan review process. Please do not submit plans for review unless all seven of the items above are included. Review times vary depending on the quality and completeness of the application, but plans submitted to the Department are typically reviewed within five business days. You will be notified via e-mail regarding any deficiencies. Please be sure to clearly indicate the e-mail address with which you would like to correspond with the Department in the “plan review contact” portion of the Plan Review Application.

Plans should be submitted to:

Suffolk County Department of Health Services
Bureau of Public Health Protection
360 Yaphank Ave, Suite 2A
Yaphank, NY 11980

Plan Review Guidelines

Plan Review Application

This document contains important information that will help the reviewer during the plan review process. There are eighteen sections that need to be completed. You must fill in all eighteen sections. Do not leave any of the requested information blank. You be notified via e-mail regarding any deficiencies. Please be sure to clearly indicate the e-mail address with which you would like to correspond with the Department in the “plan review contact” portion of the Plan Review Application. Fees for plan review are based on seating capacity. Use the fee schedule at the bottom of the application to determine the appropriate fee.

Food Establishment Permit Application

This document is an application for a permit to operate your food establishment. There are ten sections that need to be filled out. You must fill in all ten sections. Do not leave any of the requested information blank. The application must be signed by an officer of the corporation, partner or owner. Fees for permits are based on seating capacity. Use the fee schedule on the back of the application to determine the appropriate fee.

Sewage Disposal Questionnaire

There are two sewage disposal questionnaires included in the plan review packet. If your establishment is connected to sewers, you must fill out the form that relates to sewers. If your establishment has a septic system, you must fill out the form that relates to septic systems. Do not fill out both forms. You are either connected a sewer district or a septic system, not both. The form must be filled out completely. Do not leave any of the requested information blank.

If your establishment has a septic system, the project may require approvals from the Office of Wastewater Management. It is recommended that you contact them at 631-852-5700 to discuss this process prior to submitting plans. In general, if you are constructing a new building or modifying an existing building for use as a food establishment, approval from the Office of Wastewater Management is required. Approvals will also be required if you wish to expand the footprint of the building (including adding an exterior walk-in box), are increasing seating or if the site was previously permitted as a food establishment and has been closed for more than 2 years.

Sewage Disposal Questionnaire-Continued

If your establishment is connected to a sewer system, the project may require approvals from the sewer district. It is recommended that you contact the sewer district to which you are connected prior to submitting plans. In general, approvals are required if you are modifying an existing building for use as a food establishment, increasing the seating capacity, or if the building was previously permitted as a food establishment and has been closed for more than 2 years. If you are constructing a new building or expanding the footprint of an existing building (including adding an exterior walk-in box), you will require approval from both the Office of Wastewater Management and the sewer district.

Water Heater Info Sheet

This form will assist the plan reviewer in determining that you have proposed a water heater that is adequate for the needs of your establishment. Please read it carefully before filling out the requested information. You must measure the dimensions of **each basin** of your 3-compartment warewashing sink and record those measurements in the space provided. There is an additional line provided should you have a second warewashing sink in the establishment. Fill in the rest of the form as requested, including the specifications of your proposed water heater. Do not purchase a water heater until it has been approved by the Department. For assistance in determining the hot water needs of your establishment, there is a Water Heater Calculation Worksheet included in the plan review guide.

Menu

Submission of an accurate and complete menu is one of the most important aspects of the plan review process. The menu for a food establishment dictates the space and equipment requirements necessary for the safe preparation, storage and service of various food items. The menu will determine if the proposed cold holding, hot holding, storage, and preparation areas are adequate to handle the types and volumes of food being prepared and served. The menu you submit must include all of the foods and beverages that you intend to serve in your establishment. Inadequate storage space, preparation space or inadequate cold/hot holding equipment may result in restrictions on your menu.

Spec Sheets for Equipment

Specification or “cut” sheets for all of your proposed equipment are required to be submitted as part of the plan review process. A spec sheet is simply a document that summarizes the performance and other technical characteristics of your equipment. Spec sheets for most equipment can be found on-line. Spec sheets must be numbered or lettered to match the equipment schedule on the plans.

Architectural Plans

You must submit one set of ¼ scaled (1/4" = 1 foot) plans of the entire establishment. The plans must include all levels and all interior and exterior areas. While the Department does not require use of a design professional, it is recommended. Plans that are incomplete, illegible or not to scale will not be reviewed, and will cause delays in the plan review process.

Your plans should include all preparation, service, storage and seating areas as well as all toilet, dressing and laundry facilities. All storage areas should be labeled with their intended use. All refrigeration, cooking equipment, exhaust hoods, prep tables, shelving, sinks, water heaters and food protection devices such as sneeze guards and canopies should be shown and clearly labeled on the plans. Countertop equipment such as toasters, slicers, blenders, juicers and coffee pots should also be shown and clearly labeled on the plans. All equipment should be listed on an equipment schedule, and there should be accompanying spec sheets for each item that are numbered to match the equipment schedule. All equipment must be commercial grade and NSF or equivalently approved. Lastly, plans should include a flat-line plumbing riser diagram, and any exposed overhead waste lines should be clearly marked.

Additional Information

Refrigeration and Hot Holding

- Sufficient commercial refrigeration must be provided to store and maintain food below 41ºF. Refrigeration units used to hold smoked fish must be maintained below 38ºF. Quantity, type and location of these units will vary depending on your menu, preparation methods and workflow.

- If your menu includes items that will be cooked and then cooled for future service, then a walk-in refrigerator is typically required.

- Commercial-grade freezers must be provided as necessary to store and maintain food below 0ºF. Freezer units used for parasite destruction in raw fish must be maintained below -4ºF. (Additional guidelines regarding the storage of fish intended to be served raw can be found in Article 13 of the Suffolk County Sanitary Code). Quantity, type and location of these units will vary depending on your menu, preparation methods and workflow.

- If your menu includes items that will be cooked or reheated and then held hot for service throughout the day, then adequate hot-holding equipment must be provided to maintain these food items above 140ºF.

Cooking Equipment and Preparation Space

- Adequately sized and properly constructed prep space is required to allow for safe preparation of foods and to reduce the possibility of cross-contamination. Quantity and location of prep space will vary depending on your menu, preparation methods and workflow.

- Cooking and other related equipment must be commercial grade and NSF approved (or equivalent). All equipment should be installed to facilitate proper cleaning. Surfaces of all equipment should be smooth, durable and easily cleanable.

- Equipment that produces grease or condensate must be installed under an exhaust hood with grease filters. Other equipment must be sufficiently ventilated to keep the area free of excessive heat, steam, odors and fumes.

Food Protection Equipment

All food and equipment must be protected from potential contamination. Please take this into consideration while preparing your plans. Be sure to show all splash guards, food shields, gates, doors, overhead protection for outdoor areas, and spill lips at bars.

- Food shields are required whenever food or equipment may be subject to customer contamination. The configuration of these shields can vary depending on the layout of your countertops/buffet areas and the location of the equipment and food that the shield is meant to protect. In general, any food shield that meets current NSF guidelines will be acceptable to the Department. A good rule of thumb is to plan for any vertical shield without a top return to reach a height of 60 inches from the finished floor, and an angled buffet shield should terminate at a height of no more than 15 inches from the countertop.

- Overhead protection must be supplied to outdoor food prep areas and bars. Overhead protection should also be provided between exterior walk-in boxes and the interior of the establishment, and if restrooms at concession stands do not have an interior entrance for employees.

- Splash guards should be installed at any sink that is adjacent to a food prep area or adjacent to equipment that may be subject to splashing from the sink.

- Spill lips are required on bar tops to prevent food service equipment and ice from spilled drinks.

- Gates, doors, or other means of preventing patrons from accessing employee-only areas should be provided.

Storage Facilities

- Adequate storage space must be provided. Plans should indicate all storage areas, including, but not limited to storage areas for dry goods, beverages, cleaning supplies, paper goods, single-service items, linens, tableware, utensils and cookware. All storage space must be labeled on the plans. Show all racks and shelving, both free-standing and wall-mounted. Shelving must be capable of raising items at least 6 inches off the floor. Nothing may be stored under exposed waste or drain lines.

Plumbing

- Your plans must include a flat-line plumbing riser diagram. Equipment such as ware-washing sinks, dishwashers, food prep sinks, ice bins, ice machines, dipper wells and steam tables must be indirectly drained, and noted as such on the riser diagram.

Water Heater Requirements

- Adequate supply of hot water is essential for proper cleaning and sanitization of cookware and multi-use tableware. The size of your water heater is dependent on the ability of the unit to supply each fixture with 140°F water during peak demand. For tankless water heaters, each fixture is assigned a value in gallons per minute (GPM). Standard GPM values for equipment can be found on the Water Heater Calculation Sheet. For storage tank water heaters, peak demand is calculated by assigning each fixture a gallons per hour (GPH) value. Once all fixtures have been assigned a value, total usage can be added together and inserted into the formula below.
- For gas fired water heaters:

$$\text{BTU input required} = \frac{\text{gallons per hour}^{1} \times \text{temperature rise}^{2} \times 8.33 \text{ lbs./gallon } H_2O}{\text{thermal efficiency}^{3}}$$

For electric water heaters:

$$\text{KW input required} = \frac{\text{gallons per hour}^{1} \times \text{temperature rise}^{2} \times 8.33 \text{ lbs./gallon } H_2O}{\text{thermal efficiency}^{3} \times 3412 \text{ BTU/KW}}$$

[1] GPH values can be determined using the "water heater calculation sheet" on page 20. [2]Rise is equal to 100 F. [3]Thermal efficiency for a gas-fired heater is assumed to be 75% and thermal efficiency for an electric heater is assumed to be 98%

Food Prep Sinks

- Food prep sinks, dedicated only for the purpose of food preparation are highly recommended, but not required.

Ware Washing

- All facilities are required to have a commercial grade 3-compartment sink with dual drain boards. The basins of the sink must be large enough to immerse the largest utensil or piece of cookware. One side drain board with an overhead drying rack is acceptable. Be sure to indicate the drain boards and overhead drying rack on the plans. Each basin of 3-comprtment sink must be indirectly drained.

- For establishments that wish to use multi-use tableware, a mechanical dishwasher is required. Dishwashers are required to have dual drain boards, and may also require venting. Refer to the spec sheet for your equipment to determine ventilation requirements.

- A mechanical glasswasher (brush system) and a 3-compartment sink are required at bars when multi-use glassware is used. The 3-compartment sink must be equipped with dual drain boards. Establishments with a commercial dishwasher and an additional kitchen 3-compartment sink on premise may be exempt from the need for a 3-compartment sink at the bar depending on the location of said equipment. At a minimum, these bars must have a dump or rinse sink and adequate hand washing sinks.

Hand Washing Facilities

- Adequate hand washing facilities must be provided in all areas where food and beverages are handled by your employees, as well as in all ware washing areas.

- Hand washing sinks must be dedicated to hand washing only, and must be installed within 15ft of all areas mentioned above. They must also be visible, in direct line of sight, and easily accessible with unobstructed access.

- Side splash guards are required to be installed at hand sinks if they are installed next to food prep areas or equipment that may become contaminated by splashing during use of the sink. Please note the presence of splash guards on your plans.

Mop Sink

- A mop sink and accompanying hook for storage of mops is required. Floor mounted janitorial sinks are preferable. Sinks should be separated from food prep and storage areas by either distance or an enclosure.

Dipper Wells

- Dipper wells are required if you are serving bulk ice cream or ices. Be sure to indicate the presence of a dipper well on your plans.

Personal Items

- Plans should include lockers/hooks/cubbies for the storage of employee personal items.

Toilet Facilities

- If your establishment includes on premise dining, then a patron restroom is required. Patrons must be able to access the restroom without passing through food prep, storage or ware-washing areas. Patrons and employees must have interior access to the restrooms. Show all restroom equipment on your plans.

Exterior Garbage Storage

- Dumpsters should be rodent-proof and must be stored on a smooth concrete or asphalt surface. Be sure to indicate the dumpster area on the plans.

Catering

- If your menu indicates that catering is available, please be sure to write a detailed explanation of your catering activities and turn it in as part of your plan review submission.

FAQ's

Question:
I have read the plan review guidelines, and I still have questions. What can I do?
Answer:
If you have read the guidelines, and still have questions, please reach out to us at 631-852-5873 and ask to speak to one of our plan reviewers.

Question:
I am ready to submit my plans. What happens next?
Answer:
Once you have had your plans drawn, please review the checklist on page 2 of the plan review guide to ensure that you have gathered all of the necessary paperwork that is required as part of you submission. Plan packets can either be delivered in person or sent via the mail. Our address is: Suffolk County Department of Health Services 360 Yaphank Ave, Suite 2A Yaphank, NY 11980

Question:
I have submitted my plans. What happens next?
Answer:
With few exceptions, your plans will be reviewed within 5 business days. A member of our plan review team will contact you via email regarding any deficiencies.

Question:
I have received a “Notice of Plan Review” listing several items that need to be amended. What happens next?
Answer:
Take some time to carefully review the notice and correct any deficiencies in your application. When you are ready, resubmit your plans. Electronic resubmissions are accepted. If you have any questions, or if any part of the Notice of Plan Review is unclear, please contact the plan review team prior to resubmitting.

Question:
I have received a “Certificate of Approval” to construct my food establishment. What happens next?
Answer:
A Certificate of Approval means that you are now approved by the Department to begin construction at your establishment. Any conditions listed on the approval notice must be met prior to seeking a pre-operational inspection.

Question:
Construction of my establishment has been completed, and I would like to open. What do I need to do?
Answer:
Before opening, you must request a pre-operational inspection. Please call the Department at 631-852-5873 to make an appointment. Appointments are usually made no more than five business days in advance.

SUFFOLK COUNTY DEPARTMENT OF HEALTH SERVICES
PLAN REVIEW UNIT

FOOD ESTABLISHMENT PLAN REVIEW APPLICATION

1. Name of Establishment: _____ Phone No. _____

2. Address of Establishment: _____
Street Town Zip Code

3. Name of Operator: _____ Phone No. _____

4. Address of Operator: _____
Street Town Zip Code

5. Architect, Engineer or Food Consultant: _____ Phone No. _____

Street: _____ Town: _____ Zip Code: _____

6. Email address of plan review contact: _____

7.Type of Operation (check all that apply):

☐ Restaurant (with seating) ☐ Restaurant (without seating) ☐ Delicatessen ☐ Tavern ☐ Bakery ☐ Off Premise Caterer
☐ Depot w/o Food Preparation ☐ In-Home Caterer ☐ School ☐ Soup Kitchen ☐ Vending Machine ☐ Senior Nutrition
☐ Commissary ☐ Day Care ☐ Party Room ☐ Staffed Vending ☐ Frozen Dessert ☐ Other (please describe):

_____

8. Type of Construction: ☐ New ☐ Renovation ☐ Conversion to New Use

9. Describe Proposed Construction: _____

10. Is Single Service Tableware Used Exclusively?: ☐ Yes ☐ No
If you answered "NO" enter the make/model of dishwasher here (required): _____

11. Submit a Printed Menu. Plan review cannot proceed without a menu review.

12. Identify *surface* finishes below. Note that only durable, smooth and cleanable surfaces are acceptable.

AREA	CEILING	FLOOR	WALLS
KITCHEN ➢			
STORAGE AREA ➢			
BASEMENT ➢			

13. Proposed Water Heater: Make _____ **Storage (gal)** _____ **Input** _____ ☐ BTU/H ☐ KW/H
The enclosed "Water Heater Information Sheet" must also be completed.

14. Is There a Basement That Is Used for Any Food Related Activities? ☐ Yes ☐ No
Are There Any Additional Floors Above Any Food Related Areas? ☐ Yes ☐ No
Are There Any Exposed Waste Lines or Roof Drains Above Any Food Related Areas? ☐ Yes ☐ No
If "YES" to any questions in #14, submit detailed plan showing relationship of all exposed overhead waste lines to food related areas.

15. Intended Total Seating: _____ **16. Public Water?** ☐ **Yes** ☐ **No (If "No", submit lab analysis)**

17. Waste (sewage) Disposal System: ☐ **Public (Sewers)** ☐ **Private (cesspools/leaching fields)**
The "Sewage Disposal Questionnaire" appropriate for the type of waste system must also be completed.

18. Tax Map Number: District _____ **Section** _____ **Block** _____ **Lot** _____

TWO SETS of scaled plans (1/4 in. = 1 ft.) must accompany this application

YOUR SIGNATURE _____ TITLE _____ DATE _____

PLAN REVIEW FEE SCHEDULE	
TYPE OF ESTABLISHMENT	FEE
0 – 16 seats, Off-Premises Caterer	$225
17 – 49 seats, Limited/Mobile Establishments	$240
50 – 100 seats	$335
101 – 200 seats	$460
201 + seats	$630
Non-Profit	No Fee

FOR OFFICE USE ONLY

PLAN APPROVED BY: _____ **DATE:** _____

Public Health
BUREAU OF PUBLIC HEALTH PROTECTION
360 Yaphank Avenue, Suite 2A, Yaphank NY 11980
(631) 852-5999 / 852-5873 FAX (631) 852-5871

SUFFOLK COUNTY DEPARTMENT OF HEALTH SERVICES
FOOD ESTABLISHMENT PERMIT APPLICATION

IMPORTANT

Complete both sides of the application and submit ***at least*** thirty (30) days before anticipated operation. Processing may be delayed if the application is incomplete or illegible. **Note:** A preoperational permit-issuing inspection may be required before operating. Submission and approval of plans prior to operating is required if the establishment is new or substantially remodeled.

Reminder: A designated person who holds a valid food safety/food protection certificate issued by an authority approved by the Commissioner must be in charge of the food establishment during all hours of operation. In the case of an owner-operated establishment, the owner must also be certified.

For Office Use Only

[| | |] Program Element

[, , , ,] Conditions

[/ /] Issue Date

[F | A | | | | | | |] Facility I.D.

Approved by_____

PLEASE PRINT **USE BLACK INK ONLY**

1. **Name of Establishment (D\B\A)*:**_____

   Street_____

   City_____ Zip Code: Phone No.

2. **Type of Ownership**: ☐ Individual ☐ Corporation ☐ Non-Profit ☐ Partnership ☐ LLC (Submit proof of type of ownership)

3. **Billing/Year-round Mailing Address of Owner/Corporation**: (Note: Permit renewal notifications will be sent to this address)

   Name_____

   Street_____Phone No._____

   City_____ State_____ Zip Code:

4. **Email address:**

5. **Personal Mailing Address of Person Signing Application*:**

   Name_____

   Street_____Phone No._____

   City_____ State_____ Zip Code:

6. **Corporation, LLC or Partnership Name and Mailing Address:**

   Name_____

   Street_____Phone No._____

   City State Zip Code:

7. **Type of Establishment:** (*Check the appropriate box*)

☐ Restaurant (With seating) ☐ Restaurant (Without seating) ☐ Delicatessen ☐ Tavern ☐ Bakery ☐ Off-premises Caterer
☐ Depot w/o Food Preparation ☐ In-Home Caterer ☐ School ☐ SED Summer Feeding ☒ Soup Kitchen ☐ Senior Nutrition
☐ Vending Machine ☐ Commissary ☐ Party Room ☐ Staffed Vending ☐ Frozen Dessert ☐ Other_____

8. **Water Supply**: ☐ Well Water Public Water 8. **Waste Disposal System:** ☐ Public (Sewers) ☐ Private (Cesspools/leaching fields)

9. **Seats Provided**: ☐ Yes ☐ No **Number of Seats**_____

10. **Tax Map Number**: District Section Block Lot

The applicant hereby agrees to operate the food establishment described above in compliance with the requirements of the New York State and Suffolk County Sanitary Codes and all applicable laws including US EPA regulations pursuant to the Safe Drinking Water Act's Underground Injection Control (UIC) program.

Signature_____

Print Name_____

Title_____ **Date**_____

*The application must be signed by an officer of the corporation, partner or owner (see item #5). The D/B/A name (item #1) must be provided before a permit can be issued.

(See reverse for Instructions, Fee Schedule and Insurance Information)

FOR OFFICE USE ONLY

SCHEDULE OF FOOD PERMIT FEES		
TYPE OF ESTABLISHMENT		ANNUAL FEE
Tavern (No Food)..		$ 425
Bakery.		$ 425
Delicatessen.		$ 425
Frozen Dessert ..		$ 425
Off Premises Caterer.		$ 425
In Home Caterer (Contract Chef)		$ 130
Food Service:	0 to 16 Seats.	$ 425
	17 to 49 Seats.	$ 450
	50 to 100 Seats.	$ 630
	101 to 200 Seats.	$ 865
	201 + Seats.	$1,190
Food Commissary.		$ 670
School w/ Outside Caterer.		$ 510
Party Room, Staffed Vending Location.		$ 210
Depot w/o Food Preparation		$ 425
Non-Profit, Vending Machine Location (Non-profit attach copy of Tax Exempt form)		No Fee

SUBMIT THE COMPLETED APPLICATION AND A CHECK OR MONEY ORDER PAYABLE TO:
THE COMMISSIONER OF HEALTH SERVICES
(Visa/Master Card also accepted)

CHANGES OF OWNERSHIP:

Previous Name of Establishment_____

Previous Establishment Facility ID/Permit Number_____

REQUIRED INSURANCE INFORMATION:

Disability Insurance No._____ Company Name_____

Workers Comp. Insurance No._____ Company Name_____

NYS Workers Compensation Law requires that applicants submit proof of possession of Workers' Compensation and Disability Insurance coverage or an approved waiver (Form CE-200) if coverage is not provided. Contact the New York State Workers Compensation Board for requirements and applicability at 1-866-805-3630 or online at http://www.wcb.ny.gov/.
The following forms **must** be provided:

1. Workers' Compensation – Form C-105.2 **OR** Form U-26.3 **OR** Form SI-12 **OR** Form GSI-105.2
2. Disability Benefits – Form DB-120.1 **OR** Form DB-155

INSTRUCTIONS

Item #3. Provide a valid, permanent, year-round address to ensure receipt of your permit renewal application. If the permit renewal application is undeliverable, delays in issuing a permit to operate your business may result.

Return the completed application with your check or money order to:

Public Health
Prevent. Promote. Protect.

Suffolk County Department of Health Services
Bureau of Public Health Protection
360 Yaphank Avenue, Suite 2A
Yaphank, NY 11980
https://www.suffolkcountyny.gov/health
Questions?: Call (631) 852-5999

rev. 0423

SEWAGE DISPOSAL QUESTIONNAIRE: *SEPTIC SYSTEMS (TANKS, I/As & LEACHING FIELDS)*

COMPLETE AND RETURN *THIS FORM* TO THE PLAN REVIEW UNIT IF YOUR ESTABLISHMENT IS OR WILL BE CONNECTED TO A SEPTIC SYSTEM / LEACHING FIELD.

The following information concerning your establishment shall, in part, be used to determine the need for further review of your sewage disposal system. Please be advised that incompleteness or inaccuracies may result in a significant delay in processing your application.
IN ORDER TO PROCESS THIS APPLICATION, A SKETCH OF THE BUILDING WITH ALL TENANT NAMES, FLOOR AREAS AND SEATING MUST BE DRAWN ON THE BACK OF THIS FORM OR PROVIDED WITH YOUR APPLICATION.

NAME OF APPLICANT _____ **PHONE**_____

ADDRESS OF APPLICANT _____

NAME OF ESTABLISHMENT _____ **PHONE**_____

ADDRESS _____

NAME OF PROPERTY OWNER_____

ADDRESS OF PROPERTY OWNER_____

TAX MAP NUMBER: DISTRICT_____**SECTION**_____**BLOCK**_____**LOT**_____

PHYSICAL LOCATION (such as north/south side of street, east/west of nearest cross street) _____

_____

DID THIS BUILDING EVER HAVE A SUFFOLK COUNTY FOOD PERMIT? YES ☐ NO ☐
IF YES, PROVIDE FACILITY/PERMIT I.D. NUMBER_____

HAVE YOU MADE AN APPLICATION TO THE SCDHS OFFICE OF WASTEWATER MANAGEMENT? YES ☐ NO ☐

IF KNOWN, PROVIDE THEIR REFERENCE NUMBER FOR YOUR APPLICATION: _____

PRIOR NAME, IF ANY, OF TENANT/PREMISES_____

PRIOR USE (*example: deli*) _____ **DATE LAST OPENED FOR BUSINESS**_____

PRIOR SEATING: RESTAURANT_____**CATERING**_____ **BAR**_____**OUTDOOR**_____

PROPOSED SEATING: RESTAURANT_____**CATERING**_____ **BAR**_____**OUTDOOR**_____

---

1. DOES YOUR PLAN REVIEW APPLICATION INVOLVE CONSTRUCTION OF A NEW BUILDING OR AN ADDITION TO AN EXISTING BUILDING (INCLUDING WALK-IN BOXES, SHEDS, VESTIBULES, ETC.)? YES ☐ NO ☐

2. IF YOU ARE REMODELING OR OCCUPYING A FOOD ESTABLISHMENT, HAS IT BEEN OUT OF BUSINESS FOR MORE THAN TWO YEARS? YES ☐ NO ☐

3. ARE YOU PROPOSING TO INCREASE THE NUMBER OF SEATS TO BE USED FOR FOOD OR BEVERAGE SERVICE OR PROPOSING TO CONVERT A STORE TO NEW USAGE AS A FOOD OR BEVERAGE OPERATION? YES ☐ NO ☐

4. DOES YOUR SITE CONTAIN A LARGE CAPACITY CESSPOOL SUBJECT TO FEDERAL EPA REGULATIONS, PURSUANT TO SDWA's UNDERGROUND INJECTION CONTROL (UIC) PROGRAM? REFER TO https://www.epa.gov/uic/large-capacity-cesspools FOR MORE INFORMATION. YES ☐ NO ☐

IF YOU ANSWERED **YES** TO QUESTIONS 1, 2, 3 OR 4 ABOVE, YOU CAN GREATLY EXPEDITE THE REQUIRED SEWAGE REVIEW PORTION OF YOUR APPLICATION BY OBTAINING **BLUE INSTRUCTION FORM WWM-003 FROM THE SCDHS OFFICE OF WASTEWATER MANAGEMENT, FOLLOWING INSTRUCTIONS IN SECTION A OR C,** AND SUBMITTING A **COMPLETE** COMMERCIAL APPLICATION TO THE **OFFICE OF WASTEWATER MANAGEMENT**.

Signature of Applicant _____ **Date:**_____
Name (Print) _____
Signature of Property Owner_____ **Date:**_____
Name (Print) _____

For Department Use Only: Highest permitted seating at this location _____ *(Attach copies of permits showing most recent and highest approved seating at this location)*

_____

_____

_____

SEWAGE DISPOSAL QUESTIONNAIRE

SEWERS

COMPLETE AND RETURN *THIS FORM* TO THE PLAN REVIEW/FOOD UNIT IF YOUR ESTABLISHMENT IS SERVICED BY A SEWER DISTRICT OR A SEWAGE TREATMENT PLANT.

(CIRCLE YOUR ESTABLISHMENT DISTRICT)

HUNTINGTON ☐ **PATCHOGUE** ☐ **RIVERHEAD** ☐ **NORTHPORT** ☐ **OCEAN BEACH** ☐ **GREENPORT** ☐

SAG HARBOR ☐ **SUFFOLK COUNTY SEWER DISTRICT (DPW)** ☐ **OTHER** ☐ _____

---

*The following information concerning your establishment shall, in part, be used to determine the need for further review of your sewer system design. Please be advised that incompleteness or inaccuracies may result in a **significant** delay in processing your application.*

NAME OF APPLICANT _____ **PHONE**_____

ADDRESS OF APPLICANT _____

NAME OF ESTABLISHMENT _____ **PHONE**_____

ADDRESS _____

NAME OF PROPERTY OWNER_____

ADDRESS OF PROPERTY OWNER_____

TAX MAP NUMBER: DISTRICT_____**SECTION**_____**BLOCK**_____**LOT**_____

PHYSICAL LOCATION (such as north/south side of street, east/west of nearest cross street) _____

DOES THE ESTABLISHMENT HAVE A SUFFOLK COUNTY FOOD PERMIT? YES ☐ NO ☐ (CHECK ONE)

IF YES, PROVIDE PERMIT I.D. NUMBER_____ ☐ YES

HAVE YOU MADE AN APPLICATION TO THE HEALTH DEPT'S OFFICE OF WASTEWATER MANAGEMENT? ☐ NO

IF KNOWN, PROVIDE THEIR REFERENCE NUMBER FOR YOUR APPLICATION: _____

PRIOR NAME, IF ANY, OF PREMISES_____

PRIOR USE (*example: deli*) _____ **DATE LAST OPENED FOR BUSINESS**_____

PRIOR SEATING: **RESTAURANT**_____**CATERING**_____ **BAR**_____**OUTDOOR**_____

PROPOSED SEATING: **RESTAURANT**_____**CATERING**_____ **BAR**_____**OUTDOOR**_____

IMPORTANT: ATTACH AND RETURN DOCUMENTATION (S-9 FORM OR EQUIVALENT) FROM THE SEWER DISTRICT SHOWING PROOF OF SEWER CONNECTION (OR APPLICATION TO CONNECT) FOR THE PROPOSED USE OF THE PREMISES AS A FOOD ESTABLISHMENT.

DOES YOUR PLAN REVIEW APPLICATION INVOLVE CONSTRUCTION OF A NEW BUILDING OR AN ADDITION TO AN EXISTING BUILDING? YES ☐ NO ☐ (CHECK ONE)

IF YOU ANSWERED **"YES"**, YOU CAN GREATLY EXPEDITE THE REQUIRED SEWAGE REVIEW PORTION OF YOUR APPLICATION BY FILING A COMMERCIAL APPLICATION WITH THE OFFICE OF WASTEWATER MANAGEMENT (USE FORM WWM-004). REFER TO THE INSTRUCTIONS ON FORM WWM-003, SECTION B, AND SUBMIT THE COMPLETE COMMERCIAL APPLICATION PACKAGE TO THE OFFICE OF WASTEWATER MANAGEMENT FOR REVIEW AND APPROVAL OF THE EXISTING AND/OR PROPOSED WATER & SANITARY FACILITIES.

Signature of Applicant _____ **Date:**_____

Name (Print) _____

Signature of Property Owner_____ **Date:**_____

Name (Print)_____

For Department Use Only:

Highest permitted seating at this location _____

(Attach copies of permits showing most recent and highest approved seating at this location)

_____

_____

_____

_____

WATER HEATER INFO SHEET

Please fill in the information below to help the Department determine if your proposed hot water heater is adequate to meet the demands of your establishment. Do not purchase or install a hot water heater until it has been approved during the plan review process.

THREE COMPARTMENT POT WASH SINK

Measure the dimensions of each basin of your 3-compartment sink, and fill in the chart below:
(Use the second chart to record the dimensions of a second 3-compartment sink, if applicable)

	Length	Width	Depth
Basin 1			
Basin 2			
Basin 3			

	Length	Width	Depth
Basin 1			
Basin 2			
Basin 3			

DISHWASHERS

List the make and model number of each of your dishwashers below. Be sure to include any under counter glasswashers at the bar, if applicable.

Dishwasher 1	Make:	Model:	Pre-Rinse Spray Yes ☐ No ☐
Dishwasher 2	Make:	Model:	Pre-Rinse Spray Yes ☐ No ☐

HAND WASH SINKS

	Quantity
Restroom sinks	
All other hand wash sinks	

ADDITIONAL EQUIPMENT

	Quantity
Bar 3-compartment sink	
Washing Machine	
Showers	
Other	

PROPOSED WATER HEATER(S)

Use the second chart to record the specifications for a second hot water heater if applicable

Make/Model		Make/Model	
Storage Capacity		Storage Capacity	
Input (BTU or KW)		Input (BTU or KW)	

If more than one heater is proposed, how will they be plumbed? In series ☐ In parallel ☐

WATER HEATER CALCULATION WORKSHEET

NAME OF ESTABLISHMENT: **DATE:**

FIXTURE TYPE	DEMAND USAGE IN GAL/HOUR		NUMBER OF FIXTURES		SUB TOTAL DEMAND USAGE		STORAGE GALLONS REQUIRED		TANKLESS UNIT DEMAND USAGE IN GAL/MIN		TANKLESS UNIT SUB TOTAL DEMAND USAGE
BAR 3- COMPARTMENT SINK	20	X		=	0	=	0		2		0
STANDARD 3- COMPARTMENT SINK (16 X 21 X 14)	45	X		=	0	=	0		2		0
IF DIMENSIONS OF PROPOSED 3-COMPARTMENT SINK DIFFER FROM THOSE NOTED ABOVE, ENTER DIMENSIONS OF ONE BASIN BELOW	ENTER 75% CAPACITY										
	0.0	X		=	0.0	=	0.0		2		0
HAND WASH SINKS (not bathroom)	5	X		=	0		N/A		0.5		0
BATHROOM HAND SINKS	2	X		=	0		N/A		0.5		0
DISHWASHER FINAL RINSE (GAL/HR)	75% FINAL RINSE										
	0.0	X		=	0	=	N/A				0
PRE-RINSE SPRAY UNIT (at dishwasher)	45	X		=	0	=	N/A		2		0
WASHING MACHINE	22	X		=	0		N/A		2		0
SHOWER	15	X		=	0	=	N/A		2		0
OTHER EQUIP. (SPECIFY)		X		=	0	=					
				SUM:	0.0	SUM:	0.0			SUM:	0.0

Water heater recovery rate and Storage required for an oil or gas fired heater

0.0 GAL. 0.0 BTU's/Hr. input

Water heater recovery rate and Storage required for an electric water heater

0.0 GAL. 0.0 KW/Hr. input

Water heater recovery rate required for an tankless water heater

0.0 GAL. 0.0 Gal/min.

PROPOSED: **STORAGE SIZE** GAL. **INPUT** BTU OR **INPUT** KW OR **INPUT** Gal/min

COMMENTS:

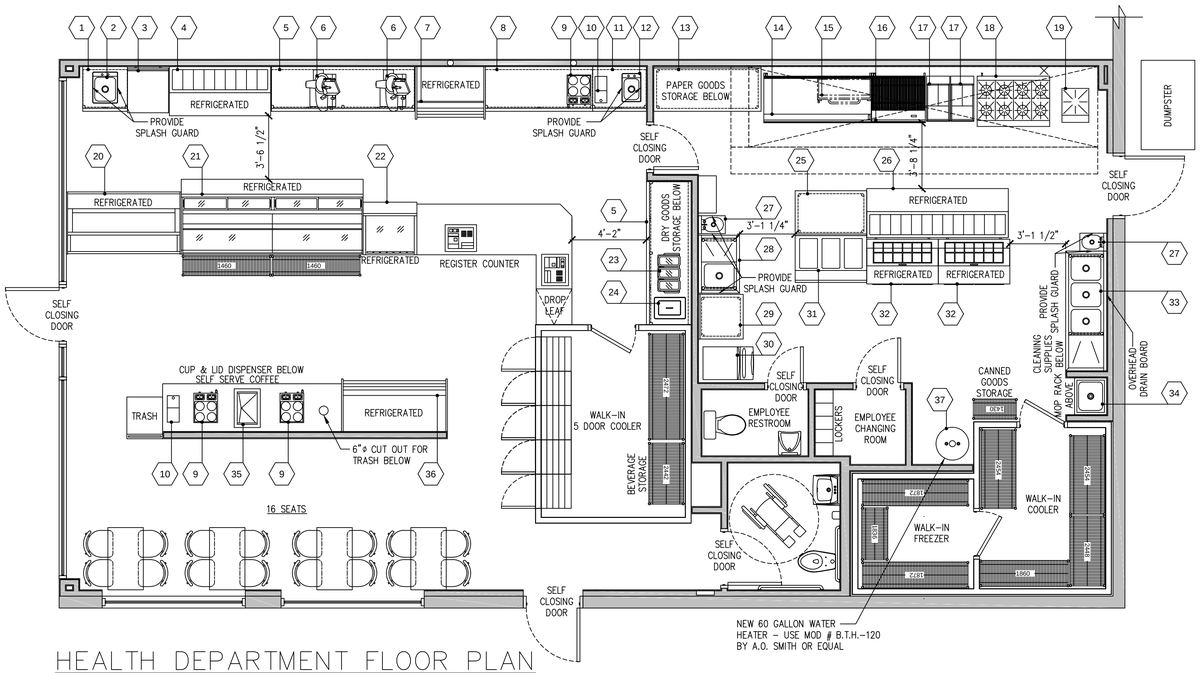

HEALTH DEPARTMENT FLOOR PLAN
SCALE: 1/4" = 1'-0"

EQUIPMENT SCHEDULE

Item No	Qty	Equipment Category	Manufacturer	Model Number
1	1	Table, Work, Enclosed Base	Eagle Group/Metal Masters	UCB3030SE
2	1	Sink, Drop-In	Eagle Group/Metal Masters	SR14-16-9.5-1
3	1	Refrigerator, Worktop	True Manufacturing Co., Inc.	TWT-27D-2
4	1	Refrigerator, Pizza Prep	Randell	8268NPCB
5	2	Table, Work, Enclosed Base	Eagle Group/Metal Masters	UCB3096SE
6	2	Slicer, Food, Electric	Globe Food Equipment	S13A
7	1	Refrigerator, Air Curtain Type	Federal Industries	RSSM-478SC
8	1	Table, Work, Enclosed Base	Eagle Group/Metal Masters	UCB3072SE
9	3	Coffee Maker, Automatic	Bunn-O-Matic	23400.0011
10	2	Coffee Grinder	Bunn-O-Matic	05800.0003
11	1	Table, Work, Enclosed Base	Eagle Group/Metal Masters	UCB3036SE
12	1	Sink, Drop-In	Eagle Group/Metal Masters	SR10-14-5-1
13	1	Table, Work	Eagle Group/Metal Masters	T3072SEB-BS
14	1	Griddle, Gas	Southbend	HDG-72
15	1	Broiler, Infrared	Southbend	P36-NFR
16	1	Broiler, Under-Fired, Gas, Counter	Southbend	HDC-36
17	2	Tube Fired Gas Fryer	Pitco	45C+
18	1	Range, Restaurant, Gas	Southbend	4481DC
19	1	Stove, Bakers/Confectioners/Stock Pot	Jade Products	JSP-18
20	1	Display Case, Self-Serve, Refrigerated	Federal Industries	SSRSP-7752-R
21	1	Deli Case, Refrigerated	Federal Industries	MCG-1054-DC
22	1	Bakery Case, Non-Refrigerated	Federal Industries	CGD3648
23	1	Dispenser, Beverage/Non-Carbonated	Crathco	D35-3
24	1	Drop-In, Ice Station	Randell	9510IC
25	1	Table, Work	Eagle Group/Metal Masters	T3048SEB-BS
26	1	Refrigerator, Pizza Prep	Randell	8395N
27	2	Sink, Hand, Wall Mount	Eagle Group/Metal Masters	HSAN-10-F-LRS
28	1	Sink, Scullery, 1 Compartment	Eagle Group/Metal Masters	414-16-1-18R
29	1	Table, Work	Eagle Group/Metal Masters	T3030SEB-BS
30	1	Ice Maker w/ Bin	Manitowoc Ice	IYT0620A-161 /D-420
31	1	Table, Hot Food	Randell	3613-240
32	2	Refrigerator, Sandwich/Salad Prep	True Manufacturing Co., Inc.	TSSU-48-12
33	1	Sink, Scullery, 3 Compartments	Eagle Group/Metal Masters	414-16-3-24R
34	1	Sink, Mop	Eagle Group/Metal Masters	F1916
35	1	Drop-In, Cold Pan	Randell	9918SCA
36	1	Refrigerator, Air Curtain Type	Federal Industries	RSSM-660SC
37	1	Hot Water Heater	A.O. Smith	BTH-120

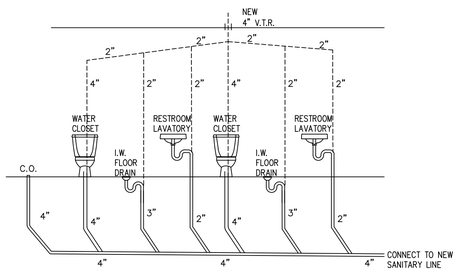

PLUMBING RISER DIAGRAM
N.T.S.

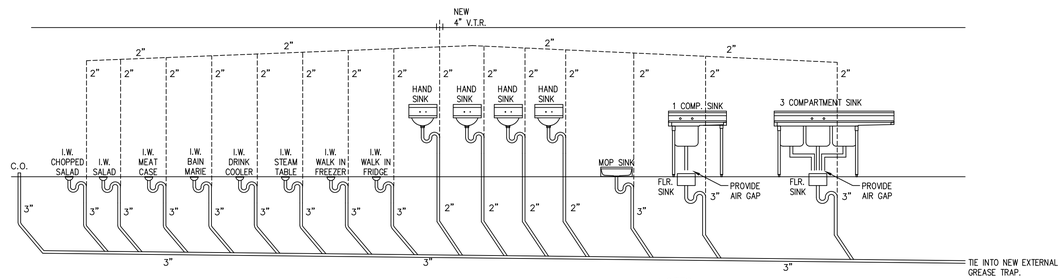

PLUMBING RISER DIAGRAM
N.T.S.

NOTE:
SEPARATE PERMIT TO BE FILED BY PLUMBER WITH BUILDING DEPT.

NOTE:
PROVIDE NEW WATER METER TIED INTO EXISTING BUILDING WATER MAIN WITH NEW SERVICE.

NOTES:
1. CONNECTIONS OF EQUIPMENT TO INDIRECT WASTE PIPING NOT SHOWN. REFER TO MANUF. CUTS FOR SPECIFIC EQUIPMENT REQUIREMENTS.
2. VENT PIPING SHALL BE IN ACCORDANCE WITH N.Y.S. BUILDING CODE.
3. HOT AND COLD WATER PIPING NOT INDICATED.
4. MAINTAIN 1/4" PER FOOT PITCH MIN. ON ALL WASTE LINES
5. MUST VERIFY EXISTING HOUSE LINE AND PITCH IN FIELD
6. MUST VERIFY EXISTING GREASE TRAP LINE AND LOCATION IN FIELD
7. ALL LAVATORIES MUST HAVE TEMPERED HOT WATER.

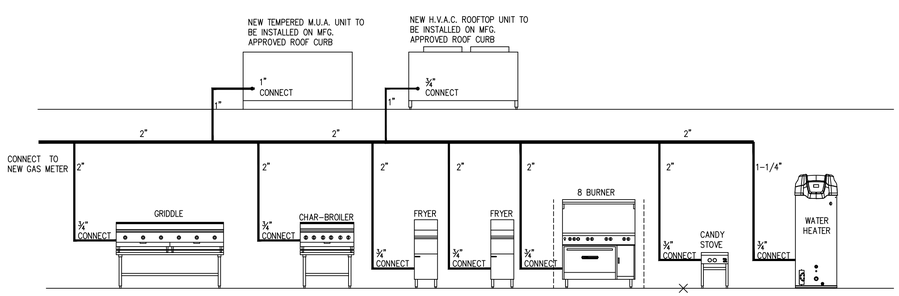

GAS RISER DIAGRAM
N.T.S.

NOTE:
SEPARATE PERMIT TO BE FILED BY PLUMBER WITH BUILDING DEPT.

NOTES:
1. PLUMBING CONTRACTOR TO VERIFY METER SIZE AND LOCATION IN FIELD.
2. PLUMBING CONTRACTOR TO VERIFY LENGTH OF RUN AND SIZE PIPE ACCORDINGLY.
3. PLUMBING CONTRACTOR TO VERIFY B.T.U. LOAD FOR KEYSPAN FOR SIZE OF NEW METER.
4. PLUMBING CONTRACTOR TO INSTALL SEPARATE GAS SHUT-OFF ON EACH PIECE OF EQUIPMENT.
5. PLUMBING CONTRACTOR SHOULD HOOK-UP KITCHEN LINED UP TOGETHER WITH COMMON REAR MANIFOLD.
6. PLUMBING CONTRACTOR TO INSTALL "ANSUL VALVE" BEFORE ALL GAS EQUIPMENT IN KITCHEN SUPPLIED BY FIRE SUPPRESSION CONTRACTOR.



INDIRECT WASTE DETAIL
SCALE: N.T.S.

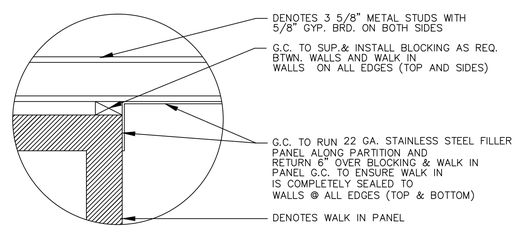

DETAIL @ WALK IN REFRIGERATOR
SCALE" 1-1/2" = 1'-0"

IT IS A VIOLATION OF N.Y.S. LAW FOR ANYONE EXCEPT THE LICENSED ARCHITECT TO ALTER THESE PLANS IN ANYWAY.

#	DATE	REVISION
1		
2		
3		
4		
5		
6		
7		

FLOOR PLAN

SEAL

DRAWN BY: CHF

DD PROJECT #: XXXXXX

DELI
STREET
CITY, NY 11XXX

JUNE, 2020

SCALE: AS NOTED

FS-1

SHEET: 1 OF 1